

Outdoor Wideband Reactive Power Splitter

PM-AS-PS-KH2-OQ500C60-LX, PM-AS-PS-KH3-OQ500C60-LX,
PM-AS-PS-KH4-OQ500C60-LX

2/3/4ways, 698-4000MHz, 4.3-10 Female, 500W

Electrical Specifications


Parameters	Unit	Specifications		
		PM-AS-PS-KH2-OQ500C60-LX	PM-AS-PS-KH3-OQ500C60-LX	PM-AS-PS-KH4-OQ500C60-LX
		2 Ways	3 Ways	4 Ways
Frequency Range	MHz	698-4000		
Splitting Loss	dB	3.0	4.8	6.0
Insertion Loss	dB	≤0.4	≤0.6	≤0.6
Input Port VSWR		≤1.25		
PIM3 at 2x43 dBm	dBc	≤-160		
Impedance	Ω	50		
Input Average Power, Maximum	W	500		

Mechanical Specifications


Parameters	Unit	Specifications		
Product Dimension, HxWxD	mm	225.5x25 x25	233.2x25x25	233.2x25x25
Connector Type		4.3-10 Female		
Operational Temperature	°C	-40~+55		
Operational Humidity	%	≤95		
Environmental Protection		IP65		

Outline Drawing

2 Ways Power Splitter

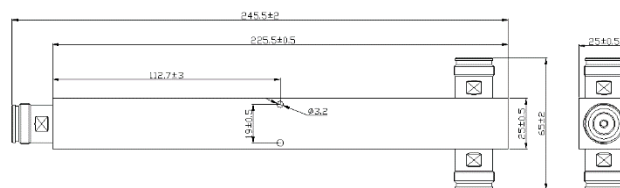

3 Ways Power Splitter

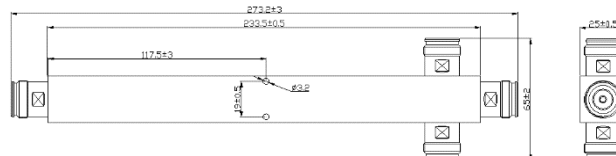

4 Ways Power Splitter

