


Cable Socket for für Kabel LF 1/2"-50 || BN 431017

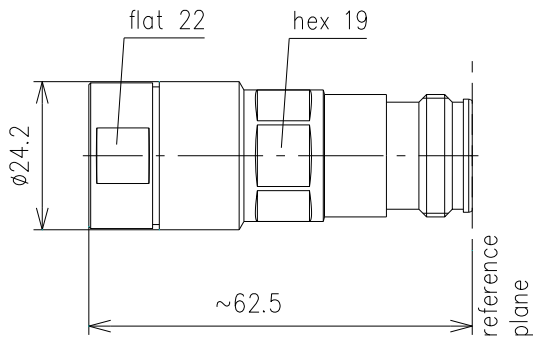

all dimensions in millimeter

Interface type	4.3-10 socket MultiFit™ (50 Ω) per IEC61169-54	
VSWR, max.	1.02 @ DC to 1 GHz 1.03 @ 1 to 2,7 GHz 1.08 @ 2,7 to 3,8 GHz 1.1 @ 3,8 to 6 GHz	
Frequency range	DC to 6 GHz	
Inner conductor material / surface finish	copper alloy / silver plated	
Outer conductor material / surface finish	copper alloy / CuSnZn plated	
Other metal parts / surface finish	copper alloy / Sn plated copper alloy / CuSnZn plated copper alloy / bright nickel plated	
Insulation	PTFE, PE	
Sealing	silicone rubber EPDM	
Degree of protection	IP68 per EN 60529 (interface connected with appropriate gasket)	
Cable compatibility	Spinner	SPINNERFlex™ LF 1/2"-50
	Acome	HPL50-1/2F
	Andrew	LDF4-50A
	Draka	RFA 1/2"-50
	Eupen	EC4-50
	Hansen	RF 50 1/2"
	Hengxin	HCAAY-50-12
	Leoni	FlexLine 1/2" R
	LS Cables	HFC 12D Flexible Foam
	RFS	LCF 12-50, LCF 12-50 L
Installation instructions	M32130	
Weight, approx.	85 g	
Included in delivery	cutting guide, installation instructions	